

GAMA SONIC®

SOLAR LIGHTING



IMPERIAL TRIO BULB SOLAR POST LIGHT

WITH TRAPEZOIDAL SOLAR PANELS AND 3" FITTER MOUNT

Part #: 37BC50012

US Patent #9458970

Version 1.1

 Please read the instruction manual carefully to obtain the best results from your purchase.

Thank you for your purchase! GAMA SONIC® solar charged lights are brighter and last all night with a typical solar charge. Unique design, superior light output and numerous installation options confirm the outstanding value of our product. GAMA SONIC® has been recognized as a worldwide leader in the lighting industry for over 20 years.

Technical Assistance/Warranty Claims/Replacement Parts
Toll Free Number: +1-800-835-4113 (only within the US) or www.gamasonic.com

Visit our website or download the latest version of your instruction manual:
www.gamasonic.com



Gama Sonic's Bulb Technology


Gama Sonic's patented Bulb technology gives your solar lamp the look and feel of a traditional incandescent lamp. This helps to distribute light further than traditional solar lamps.

Solar Lamp Location

For optimum light duration throughout the night, it is very important to mount your solar lamp in a spot where it will receive the maximum amount of direct sunlight throughout the day.

What's In The Box

A = Top
B = Fixture
C = Acorn Finial
D = Eagle Finial
E = Finial Cap
F = 3" Fitter
G = Candelabra adapter

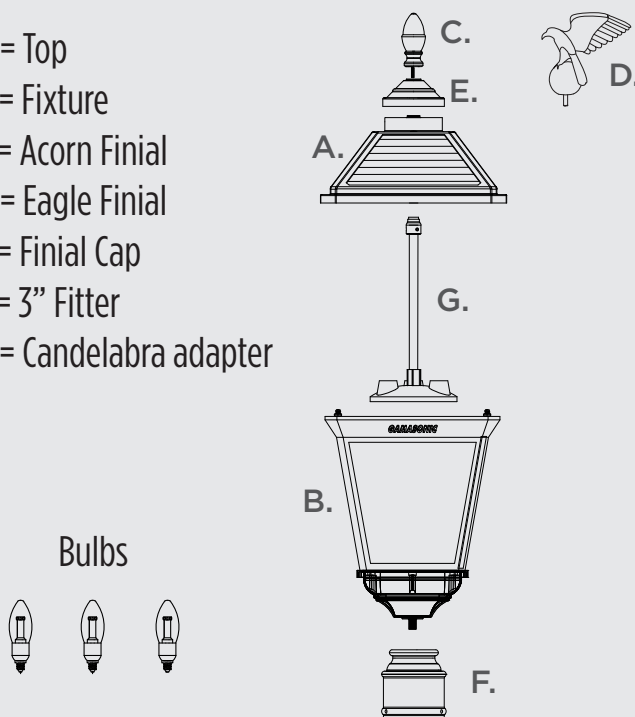

For best results, the solar light must be charged in the "ON" (High or Low) position for at least 2 days of full direct sunlight.

Assembly Instructions


NOTE: If you are replacing an existing gas/electric post light, you must consult a certified technician to disconnect them before installation.

- Install the 3" Fitter (F) to the fixture (B) by twisting it clockwise onto the threaded rod. Make sure it is fastened securely.
- Remove the rubber caps from the four posts at the top of the fixture (B).
- Install each of the three bulbs into a socket of the candelabra adapter (G) by twisting them clockwise.

NOTE: Be sure to hold the bulb by its base and not the glass.

- Install the candelabra adapter (G) into the bulb socket in the top (A) by twisting clockwise.
- Follow the Operation Instructions to turn the lamp on and select your desired setting.
- Assemble the top (A) to the fixture (B) by lining up the four posts with the grooves in the top (A).
- Twist the top (A) clockwise to secure on the fixture (B).
- Place the finial cap (E) on the top of the lamp.
- Choose the finial of your choice (C or D) and screw it into the top (A) through the finial cap (E) and twist it clockwise.
- Install the lamp on your existing 3" post and secure by tightening the set screws.


NOTE: Do not over-tighten the set screws.

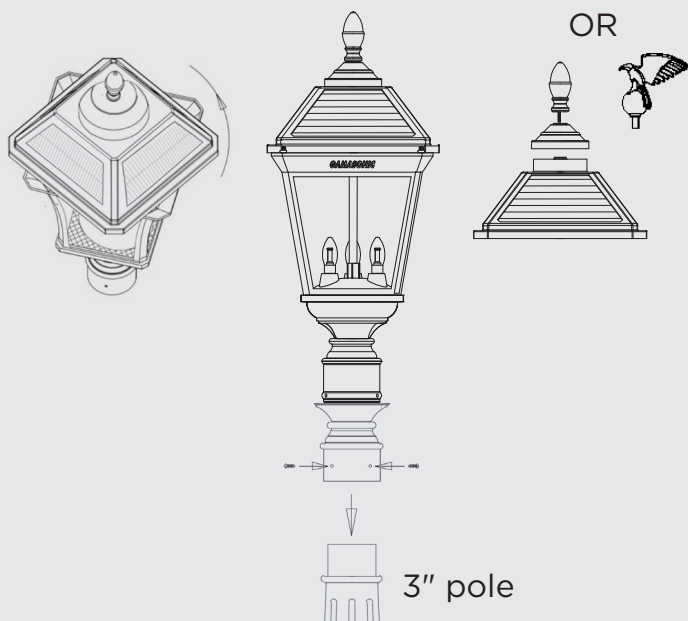

Operation Instructions

1. Remove the top (A) from the fixture (B).
2. Screw in the GS Solar LED bulbs into the Candelabra adapter (G).
3. Screw the candelabra adapter (G) into the top (A).
4. Move the operation switch to the High or Low position according to your preferences:
 - **Low** = softer light, longer duration
 - **High** = brighter light output
5. Replace the top (A) to the fixture (B) by twisting clockwise.

Your lamp will operate automatically at dusk.

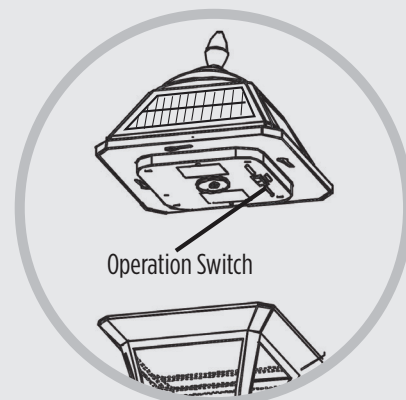

Replacement Parts

Replacement Batteries and Bulbs are available at www.gamasonic.com or via our Toll Free number: +1-800-835-4113.

Your Lamp can use three of the following bulbs:

C37WW10W – included bulbs with Warm White LEDs (2700K)

C37BW10W – bulb with Bright White LEDs (6000K)

T45WW10W – Edison LED Bulb with Warm White LEDs (2700k)

Your lamp uses two of the following battery:

GS32V30




Replacing the Batteries

GAMA SONIC®
SOLAR LIGHTING

After several years of use, the battery may need replacing.

1. Remove the top (A) from the fixture (B) by twisting counterclockwise.
2. Switch the lamp off and remove the candelabra adapter (G).
3. Remove the battery compartment screw and cover.
4. Remove the battery and unclip the connector.
5. Make sure the new battery is a 3.2V/3000mAh Li-Ion battery with matching connector (Item # GS32V30)
6. Clip the battery in and install the battery in the compartment.
7. Replace the battery cover and screw.
8. Repeat steps 3-7 for the second battery.
9. Re-install the candelabra adapter (G) and switch the lamp back on.
10. Place the top (A) back on top of the fixture (B) and secure by twisting clockwise.

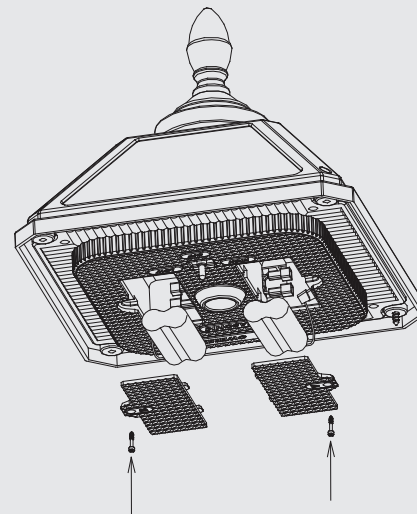

Batteries are available for purchase at www.gamasonic.com

MAINTENANCE

Clean the solar panels regularly with a damp towel to guarantee optimum performance. Do not use any type of solvent for cleaning and be careful not to put too much pressure on the solar panels while cleaning.

TROUBLESHOOTING

If your solar light does not come on as expected despite observance of all the instructions, please try the following steps:

1. Make sure that the solar lamp is not being affected by any other light source.
2. Ensure the solar lamp is not positioned in the shade during the day.
3. Check that the batteries are installed correctly.

NOTE: The performance of the solar lamp will vary with the time of year. It will last longer when it has had a full day in the sun rather than a day in overcast weather.



WINTERTIME TIPS: For optimal performance, be sure to remove any snow or debris accumulation from solar panel(s). A solar panel free of debris will charge the batteries much more efficiently.



WARNING: Please keep out of reach of children. Do not dispose of Li-Ion battery in the regular trash, municipal waste stream or by fire as batteries may leak or explode. Do not open, short circuit, or mutilate batteries as injury may occur. Preserve our environment by recycling Li-Ion batteries or disposing of them in accordance with local, state and federal regulations. Do not mix old and new batteries.