



# **GAMA SONIC<sup>®</sup>**


## **SOLAR LIGHTING**

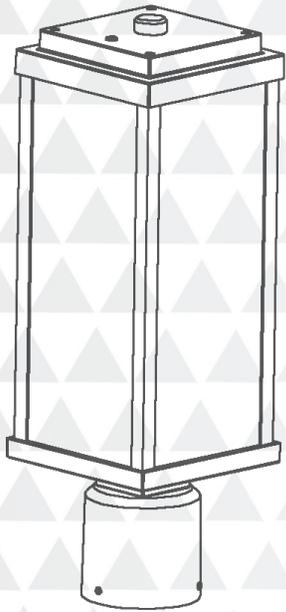

**3" FITTER**

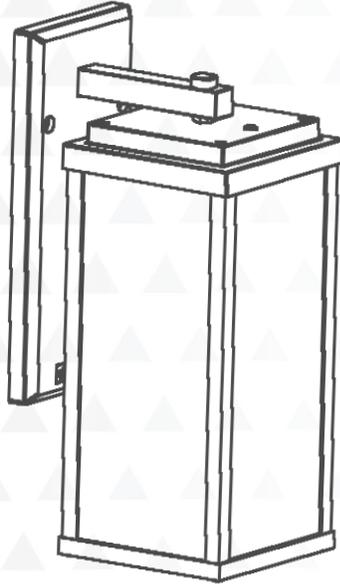

**WALL**

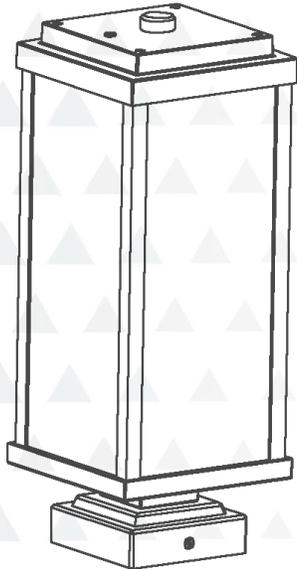

**PIER/ACCENT**



## **MODERN NOVA TRANSLUCENT SOLAR LIGHT WALL/PIER/3" FITTER MOUNTS**

Part #: 55BZ50033

 Please read the instruction manual carefully to obtain the best results from your purchase.

Thank you for your purchase! GAMA SONIC® solar charged lights are brighter and last all night with a typical solar charge. Unique design, superior light output and numerous installation options confirm the outstanding value of our product. GAMA SONIC® has been recognized as a worldwide leader in the lighting industry for over 20 years.

**Technical Assistance/Warranty Claims/Replacement Parts**  
**Toll Free Number: +1-800-835-4113 (only within the US) or [www.gamasonic.com](http://www.gamasonic.com)**

**Visit our website or download the latest version of your instruction manual:**  
**[www.gamasonic.com](http://www.gamasonic.com)**



### Gama Sonic's Bulb Technology

This innovative technology replicates the inviting glow of traditional incandescent bulbs while harnessing the efficiency of solar power, boasting a remarkable 10-year lifespan and a 360° light spread.


### Solar Lamp Location

For optimum light duration throughout the night, it is very important to mount your solar lamp in a spot where it will receive the maximum amount of direct sunlight throughout the day

For best results, the solar light must be charged in the "ON" (High or Low) position for at least 2 days of full direct sunlight.


### What's In The Box

- |                       |                        |
|-----------------------|------------------------|
| A = Light fixture     | G = Pier cap           |
| B = Bulb              | H = Flat mount bracket |
| C = Wall bracket      | I = Bolt               |
| D = Wall bracket arm  | J = Nut                |
| E = Arm locking screw | K = Screws and anchors |
| F = 3" Fitter         |                        |

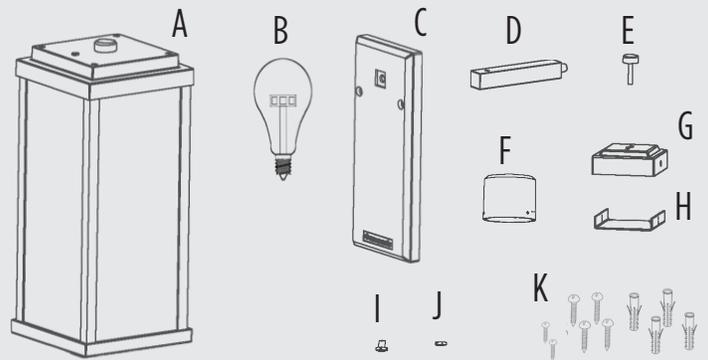


## Assembly Instructions

- Remove the bottom panel of the fixture by unscrewing the four corner screws.
- Follow the operation Instructions to turn the lamp on
- Install the GS Solar LED Bulb by twisting it clockwise. Be sure to hold the bulb by its base.

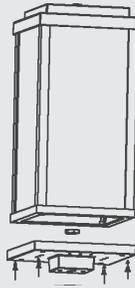


### Wall Mount

- Attach the bracket arm (D) to the wall bracket (C) and secure it using the locking nut.
- Use the wall bracket (C) as a template to mark and drill two level holes at the mounting location. Insert the anchors, then secure the bracket using the provided long screws.
- Remove the top cover screw from the fixture. Attach the fixture to the support arm (D) and secure it using the arm locking screw (E).

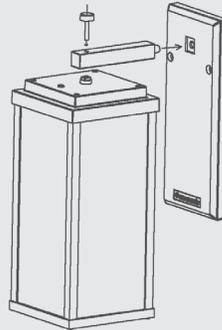

### 3" Fitter Mount

- Connect the bottom panel with the fitter (F), insert the bolt (I) up through the fitter (F) into the bottom panel, then secure with the nut (J).
- Reattach the bottom panel to the fixture using the four corner screws. Place onto your existing 3" pole and secure it using the provided (3) set screws.

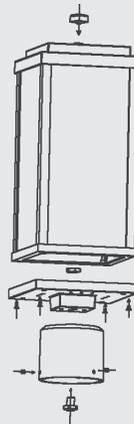

### Pier Mount

- Connect the bottom panel with the Pier cap (F), insert the bolt (I) up through the Pier Cap (G) into the bottom panel, then secure with the nut (J).
- Reattach the bottom panel to the fixture using the four corner screws.



### Option A: Flat Surface Mount

- Use the flat bracket (H) as a template to drill four holes, secure it with anchors and screws, then attach the Pier Cap (G) by aligning the side holes and secure it with the provided set screws.

### Option B: 4x4 Post Mount

- Slide the Pier Cap (G) on top of the wooden post and secure it with the provided two screws.

**NOTE: Do not over-tighten the screws to avoid damage.**


## Operation Instructions

- Before installing the bulb move the operation switch to the High or Low position according to your preferences:

**Low** = softer light, longer duration

**High** = brighter light output

Your lamp will turn on automatically at dusk.

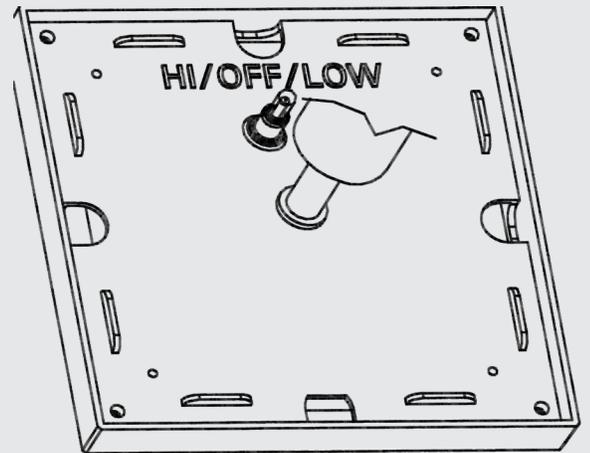

## Replacement Parts

Replacement Batteries and Bulbs are available at [www.gamasonic.com](http://www.gamasonic.com) or via our Toll Free number: +1-800-835-4113.

Your Lamp can use the following bulbs:

A60WW20W – included bulb with Warm White LEDs (2700K)

A60BW20W – bulb with Bright White LEDs (6000K)

Your lamp uses the following battery:

GS32V30




## Replacing the Batteries

**GAMA SONIC®**  
SOLAR LIGHTING

**After several years of use, the battery may need replacing.**

1. Switch the unit to the OFF position.
2. Unscrew the four corner screws on the top of the fixture and remove the cover.
3. Remove the screw securing the metal bracket that is holding the battery in place.
4. Unplug the connector and remove the old battery.
5. Make sure the new batteries are a high-quality Li-Ion battery with matching connector, Part# GS32V30.
6. Clip in the new batteries and install the batteries in the compartment.
7. Reassemble the lamp by reversing steps 1-4

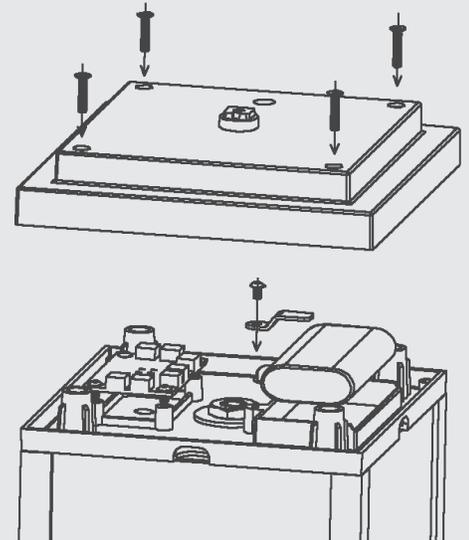

**Batteries are available for purchase at [www.gamasonic.com](http://www.gamasonic.com)**

### MAINTENANCE

Clean the solar panels regularly with a damp towel to guarantee optimum performance. Do not use any type of solvent for cleaning and be careful not to put too much pressure on the solar panels while cleaning.

### TROUBLESHOOTING

If your solar light does not come on as expected despite observance of all the instructions, please try the following steps:

1. Make sure that the solar lamp is not being affected by any other light source.
2. Ensure the solar lamp is not positioned in the shade during the day.
3. Check that the batteries are installed correctly.

NOTE: The performance of the solar lamp will vary with the time of year. It will last longer when it has had a full day in the sun rather than a day in overcast weather.



**WINTERTIME TIPS:** For optimal performance, be sure to remove any snow or debris accumulation from solar panel(s). A solar panel free of debris will charge the batteries much more efficiently.



**WARNING:** Please keep out of reach of children. Do not dispose of Li-Ion battery in the regular trash, municipal waste stream or by fire as batteries may leak or explode. Do not open, short circuit, or mutilate batteries as injury may occur. Preserve our environment by recycling Li-Ion batteries or disposing of them in accordance with local, state and federal regulations. Do not mix old and new batteries.